


HIGH PERFORMANCE NXP i.MX8 SERIES

conga-SMX8

PRELIMINARY

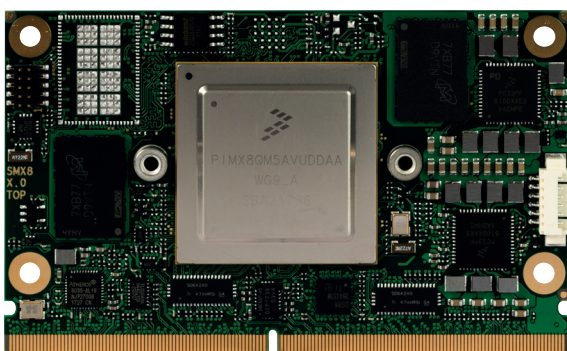

- NXP i.MX8 ARM Cortex-A72, Cortex-A53 and Cortex-M4
- Advanced Graphics, Performance and Virtualization
- 3D Graphics up to 4K with HDMI 2.0a & LVDS
- Vision Extensions, MIPI CSI-2 dual camera interface
- Extended longevity up to 15 years
- Temperature range up to -40°C .. +85°C



Formfactor	SMARC Specification 2.0 82x50 mm ²				
CPU	NXP i.MX8 ARM Processor Cores				
		ARM Cortex-A72	ARM Cortex-A53	ARM Cortex-M4F	GPU
	i.MX8 QuadMax	2x	4x	2x	2x GC7000XSVX
	i.MX8 QuadPlus	1x	4x	2x	2x GC7000Lite/XSVX
	i.MX8 DualMax	2x	-	2x	2x GC7000Lite/XSVX
DRAM	Up to 8 GByte onboard LPDDR4 memory 3200 MT/s				
Ethernet	2x 1 Gbit Ethernet				
I/O Interfaces	5x USB 2.0 (shared with 1x USB OTG client) up to 1x USB 3.0 1x SATA III 1x SDIO 3.0 up to 3x PCIe 3.0 (one shared with SATA III), 2 root ports I ² C Bus SPI QSPI 4x UART 2x FlexCAN optional M.2 1216 WiFi module (soldered down)				
Mass Storage	eMMC 5.0 up to 64 GByte Onboard MicroSD 3.0 card socket				
Sound	2x I ² S				
Graphics	Integrated in NXP i.MX8 Series dual GT7000 multimedia GPU VPU (4K h.265 dec / HD h.264 enc) 2D Graphics (GPU2D) and 3D Graphics (GPU3D) 3D graphics with 4 high performance vec4 shaders up to 16 execution units 2 independent displays dual stream 1080p/720p decoder/encoder OpenGL 3.1 Vulkan VX extensions OpenCL 2.0				
Video Interfaces	HDMI 2.0a with HDCP 2.2 1x dual channel LVDS 24 bit eDP 1.4 output and DP 1.3 output (shared with HDMI) 1x MIPI-DSI with 4-lanes each shared with second LVDS channel 1x MIPI-CSI x4 and 1x MIPI-CSI x2				
Features	Watchdog Timer I ² C bus 400 kHz JTAG debug interface High Precision Real Time Clock				
Virtualization	Multiple Domains with Hardware Virtualization Multiple Operating System Support System MMU Resource Partitioning and Split GPU				
Security	High Assurance Boot support Inline Encryption Engine (AES-128) TNG, AES-128, AES-256, 3DES, ARC4, RSA4096, SHA-1, SHA-2, SHA-256, MD-5 RSA-1024, 2048, 3072, 4096				
Boot Loader	U-Boot boot loader				
Operating Systems	Linux Yocto Android				
Power Consumption	Typ. application tbd. @ 5V				
Temperature	Operating:	0 to +60°C commercial grade -40 to +85°C industrial grade			
	Storage:	-40 to +85°C			
Humidity	Operating:	10 to 90% r. H. non cond.			
	Storage:	5 to 95% r. H. non cond.			
Size	82 x 50 mm (3,23" x 1,97")				